


S-WP Pump Curves

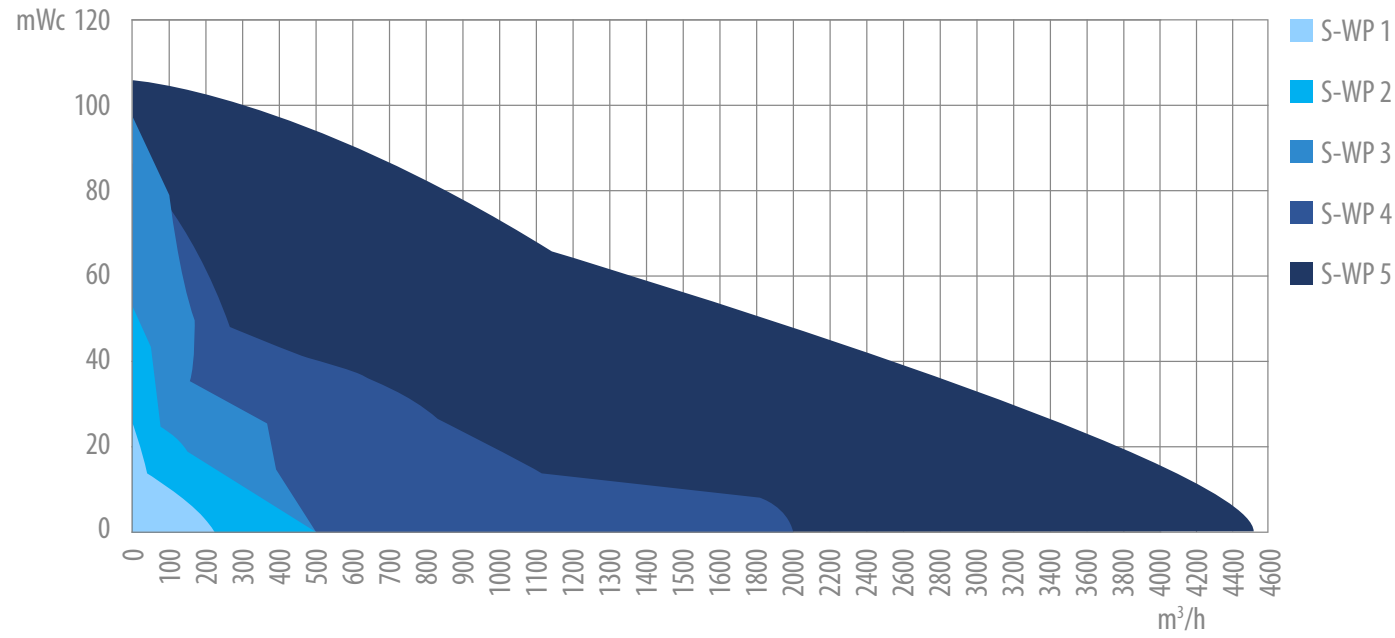

Materials	
Pump Housing, Base Elbow, Sealing Housing	Grey Cast Iron GJL-250 (GG25) A-48 Class35
Impeller (cast iron), adapter	Ductile Cast Iron GJS-400-15 (GGG-40) A536 GR 65-45-15
Stainless Impeller (option)	Stainless Cast Steel W.Nr.1.4401 / AISI 316
Shaft	Stainless Steel W.Nr.1.4057 / AISI 431
Seal Sleeve, Screws	Stainless Steel W.Nr.1.4301 / AISI 304
Coolant	30% Propylene glycol 70% Water
O-rings	Nitrile/ NBR
Oil	Mobil DTE 24 Premium Hydraulic
Mechanical Seal	Media Side: SIC/SIC Cooling Side: SIC (Carbon)
Motor	Siemens /IE3 / Class F Optional as class H

Customized Impellers

DanPumps have a wide variety of impellers. Channel 1, Channel 2, Vortex and open or half-open channel impellers called B-tween impellers.

They are delivered standard in ductile cast iron GJS-400-15 (GGG40) or stainless steel (AISI 316) as an option. All the impellers are designed for non-clogging and all the impellers fit in the same volute and will be trimmed according to customer demands.

Advantages:

- Cartridge seal
- Fast lock latch bolts
- Oil tap drain
- Closed cooling jacket
- Adjustable wear ring
- Channel and vortex impellers in the same volute
- High-efficiency motors
- Few spare parts
- Easy maintenance and dismantling

Type	kW P2	Rpm	Weight in kg Wet install	Weight in kg Dry install	Weight in kg Portable install	Weight in kg Base elbow	Throughlet in mm	Outlet flange
S-WP0-30-2 - 1.ph	0,35	2850	NA	NA	6	NA	5	R1"
S-WP0-37-2	0,55	2850	14	NA	14	5	36	R1½"
S-WP0-50-2 - 1.ph	0,8	2850	22	NA	22	5	45	R2"
S-WP0-50-2	0,8	2850	22	NA	22	5	45	R2"
S-WP0-65-2	1,85	2850	33	NA	34	13	55	R2½"
S-WP0-65-2	2,2	2850	40	NA	41	13	55	R2½"
S-WP0-65-4	1,1	1430	32	NA	33	13	55	R2½"
S-WP1-70-2	1,5/1,8	2930/3500	90	102	104	35	60	DN80
S-WP1-70-2	2,2/2,7	2930/3500	92	100	102	35	60	DN80
S-WP1-70-2	3,0/3,5	2930/3500	92	100	102	35	60	DN80
S-WP1-70-2	3,5/4,4	2930/3500	95	102	105	35	60	DN80
S-WP1-80-4	1,1/1,3	1460/1700	95	102	105	35	60	DN100
S-WP1-80-4	1,5/1,8	1460/1700	92	100	102	35	60	DN100
S-WP1-80-4	2,0/2,3	1460/1700	92	100	102	35	70	DN100
S-WP1-80-4	2,5/2,7	1460/1700	92	100	102	35	70	DN100
S-WP1-80-4	3,0/3,5	1460/1700	92	100	102	35	70	DN100
S-WP2-80-2	6,5/7,3	2930/3500	148	150	150	35	70	DN80
S-WP2-80-2	9,0/11,0	2930/3500	151	153	154	35	70	DN80
S-WP2-80-2	11,0/12,6	2930/3500	151	153	154	35	70	DN80
S-WP2-100-4	4,0/5,6	1460/1700	143	145	145	36	100	DN100
S-WP2-100-4	6,0/7,3	1460/1700	151	153	153	36	100	DN100
S-WP2-100-4	7,5/8,6	1460/1700	151	153	153	36	100	DN100
S-WP2-100-4	9,0/11,0	1460/1700	157	161	161	36	100	DN100
S-WP2-100-6	2,5/3,3	970/1000	142	144	144	36	100	DN100
S-WP2-100-6	5,5/6,3	970/1000	156	160	160	36	100	DN100
S-WP2-150-4	4,0/5,6	1460/1700	148	150	150	65	100	DN150
S-WP2-150-4	6,0/7,3	1460/1700	159	161	161	65	100	DN150
S-WP2-150-4	7,5/8,6	1460/1700	159	161	161	65	100	DN150
S-WP2-150-4	9,0/11,0	1460/1700	164	170	170	65	100	DN150
S-WP2-150-6	2,5/3,3	970/1000	156	158	158	65	100	DN150
S-WP2-150-6	5,5/6,3	970/1000	160	163	163	65	100	DN150
S-WP3-80-2	7,5/8,6	2930/3500	205	207	207	36	70	DN100
S-WP3-80-2	9,0/11,0	2930/3500	205	207	207	36	70	DN100
S-WP3-80-2	12,5/14,0	2930/3500	219	221	221	36	70	DN100
S-WP3-80-2	18,5/21,3	2930/3500	219	221	221	36	70	DN100
S-WP3-80-2	22,0/25,3	2930/3500	219	221	221	36	70	DN100
S-WP3-80-2	25,0/28,0	2960/3500	219	221	221	36	70	DN100
S-WP3-100-4	7,5/8,6	1460/1700	201	203	207	36	100	DN100
S-WP3-100-4	9,0/11,0	1460/1700	204	206	211	36	100	DN100
S-WP3-100-4	12,5/14,0	1460/1700	225	227	232	36	100	DN100
S-WP3-100-4	17,0/20,1	1460/1700	241	243	247	36	100	DN100
S-WP3-100-4	18,5/21,3	1460/1700	201	203	207	36	100	DN100
S-WP3-100-4	22,0/25,3	1460/1700	246	247	250	36	100	DN100
S-WP3-100-6	6,6/7,5	970/1000	223	225	225	36	100	DN100
S-WP3-100-6	11,5/12,6	970/1000	270	272	272	36	100	DN100
S-WP3-150-4	7,5/8,6	1460/1700	215	217	227	65	100	DN150
S-WP3-150-4	9,0/11,0	1460/1700	217	219	229	65	100	DN150
S-WP3-150-4	12,5/14,0	1460/1700	238	240	250	65	100	DN150
S-WP3-150-4	15,0/17,5	1460/1700	238	240	250	65	100	DN150
S-WP3-150-4	18,5/21,3	1460/1700	215	217	227	65	100	DN150
S-WP3-150-4	22,0/25,3	1460/1700	259	262	270	65	100	DN150
S-WP3-150-6	6,6/7,5	970/1000	223	225	235	65	100	DN150
S-WP3-150-6	11,0/12,6	970/1000	270	272	282	65	100	DN150
S-WP4-100-4	18,5/21,3	1460/1700	443	593	474	36	80	DN100
S-WP4-100-4	22,0/25,3	1460/1700	453	603	484	36	80	DN100
S-WP4-100-4	30,0/33,5	1460/1700	499	626	510	36	80	DN100
S-WP4-100-4	37,0/42,5	1460/1700	549	674	560	36	80	DN100
S-WP4-100-4	45,0/52,0	1460/1700	592	717	603	36	80	DN100
S-WP4-100-4	55,0/62,0	1460/1700	604	729	615	36	80	DN100
S-WP4-100-4	65,0/78,0	1460/1700	604	729	615	36	80	DN100
S-WP4-150-4	18,5/21,3	1460/1700	466	573	475	65	100	DN150
S-WP4-150-4	22,0/25,3	1460/1700	476	583	485	65	100	DN150
S-WP4-150-4	30,0/33,5	1460/1700	502	609	510	65	100	DN150
S-WP4-150-4	37,0/42,5	1460/1700	553	654	560	65	100	DN150
S-WP4-150-4	45,0/52,0	1460/1700	596	697	603	65	100	DN150
S-WP4-150-4	55,0/62,0	1460/1700	608	709	615	65	100	DN150
S-WP4-150-4	65,0/78,0	1460/1700	608	709	615	65	100	DN150
S-WP4-200-4	18,5/21,3	1460/1700	515	615	547	76	100	DN200
S-WP4-200-4	22,0/25,3	1460/1700	525	625	557	76	100	DN200
S-WP4-200-4	30,0/33,5	1460/1700	533	638	570	76	100	DN200
S-WP4-200-4	37,0/42,5	1460/1700	583	683	620	76	100	DN200
S-WP4-200-4	45,0/52,0	1460/1700	626	726	663	76	100	DN200
S-WP4-200-4	55,0/62,0	1460/1700	638	738	675	76	100	DN200
S-WP4-200-4	65,0/78,0	1460/1700	638	738	675	76	100	DN200
S-WP4-200-6	18,5/22,0	970/1000	533	638	570	76	100	DN200
S-WP4-200-6	22,0/26,0	970/1000	566	666	603	76	100	DN200
S-WP4-200-6	30,0/36,0	970/1000	616	716	653	76	100	DN200
S-WP4-200-6	37,0/44,5	970/1000	625	725	662	76	100	DN200
S-WP4-250-4	18,5/21,3	1460/1700	533	638	570	235	100	DN250
S-WP4-250-4	22,0/25,3	1460/1700	513	618	550	235	100	DN250
S-WP4-250-4	30,0/33,5	1460/1700	533	638	570	235	100	DN250
S-WP4-250-4	37,0/42,5	1460/1700	583	683	620	235	100	DN250
S-WP4-250-4	45,0/42,0	1460/1700	626	726	663	235	100	DN250
S-WP4-250-4	55,0/62,0	1460/1700	974	978	974	235	100	DN250
S-WP4-250-4	65,0/78,0	1460/1700	974	978	974	235	100	DN250
S-WP4-250-6	18,5/22,0	970/1000	533	638	570	235	100	DN250
S-WP4-250-6	22,0/26,0	970/1000	566	666	603	235	100	DN250
S-WP4-250-6	30,0/36,0	970/1000	616	716	653	235	100	DN250
S-WP4-250-6	37,0/44,5	970/1000	625	725	662	235	100	DN250
S-WP4-300-6	18,5/22,0	970/1000	700	763	784	235	100	DN300
S-WP4-300-6	22,0/26,0	970/1000	733	791	817	235	100	DN300
S-WP4-300-6	30,0/36,0	970/1000	783	841	867	235	100	DN300
S-WP4-300-6	37,0/44,5	970/1000	792	850	876	235	100	DN300
S-WP4-300-6	45,0/54,0	970/1000	1200	1210	1200	235	100	DN300
S-WP4-300-8	18,0/22,0	730/900	710	774	794	235	100	DN300

NA = Not available

About Rotadyne

A privately-owned Australian family business, Rotadyne is situated in North St Marys, Sydney and celebrated its 50th anniversary in 1973. The Rotadyne story is one of continuous excellence and success in the boundaries of innovation.

Rotadyne has a passion for custom moulding and we are proud to have worked with countless iconic clients which have been highly successful in dominating their industry markets locally and internationally. We aim to afford you with the flexibility to create and customise your products exactly as you envision it.

Design and Manufacturing

Custom doesn't just describe our ability to create our useful designs and introduce new product features. It also refers to our flexible manufacturing strategies which are adjusted to suit each individual project. We leverage industry expertise to manage the process on behalf of our customer.

We guide our clients through the whole process from design to tooling to manufacture. The end result is an optimised experience taking your smart ideas and turning them into tangible market ready products.

Quality Products

Rotadyne supplies a range of industry products such as Marine equipment, food and fitting systems and more. We take pride in delivering high quality commodities and in our capabilities for customisation.

In addition to our product ranges we also provide advanced systems for waste water, water management and chemical industries including high quality tanks and required instrumentation.

Director
Owner and CEO

12.2022

